

# Power Supply Connections for Your CET Signal Conditioner Card

## Application Note

### Power Requirement for CET Card

The CET signal conditioner card (referenced in this application note as CET card) can be powered from various sources. The recommended sources are discussed in the following sections.

The input supply voltage to the CET card is +12 V @ 0.3 A. The selected source to provide the power needs to be controllable through the test plan execution. Power to the CET card must be uninterrupted for the duration of powered testing. If power to the CET card is disconnected, an “unpowered” command must be issued before turning the power back on.



# Power Requirement for CET Card

Power is connected via a wire wrap of AWG28 wires to pins 11 and 12 of J6 of the CET card. There is another pair of power connections on J6 at pins 3 and 4. These are the power connections for the USB and do not provide power to the CET card itself.

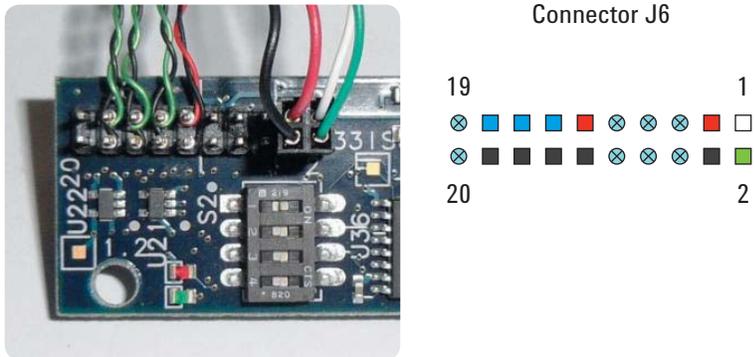


Figure 1. Connections on CET card (J6 connector)

Table 1. Pin layout of J6 connector on CET card

CET card (J6 connector)	Wire color	Wire type	Remarks
Pin 1	White	Boxed header	USB D-
Pin 2	Green		USB D+
Pin 3	Red		USB +
Pin 4	Black		USB -
Pin 5	Not wired		For future use
Pin 6	Not wired		For future use
Pin 7	Not wired		For future use
Pin 8	Not wired		For future use
Pin 9	Not wired		For future use
Pin 10	Not wired		For future use
Pin 11	Red AWG28 Wire	Twisted pair	CET Card Supply (+)
Pin 12	Black AWG28 Wire		CET Card Supply (GND)
Pin 13	Blue AWG28 Wire	Twisted pair	node "~LEM_A~"
Pin 14	Black AWG28 Wire		CET GND
Pin 15	Blue AWG28 Wire	Twisted pair	node "~LEM_R~"
Pin 16	Black AWG28 Wire		CET GND
Pin 17	Blue AWG28 Wire	Twisted pair	node "~LEM_M~"
Pin 18	Black AWG28 Wire		CET GND
Pin 19	Not wired		For future use
Pin 20	Not wired		For future use

The CET signal conditioner card can be powered by three recommended power sources:

1. DUT power supplies
2. Auxiliary connect channels on USB interface kit
3. Fixture power supplies on ASRU-N Card

The power method and wiring are described in the following sections.

## 1. DUT Power Supplies

Using the device under test (DUT) power supplies is the simplest way to power the CET card. A DUT power supply channel is well designed with proper isolation between the power nodes on the DUT and the system grounds. As such, users do not need to worry about possible shorts between the DUT board ground nodes to the system grounds. DUT power supply output channels are available on the ASRU card MINT pins. Each channel outputs to a group of six MINT pins on the ASRU card.

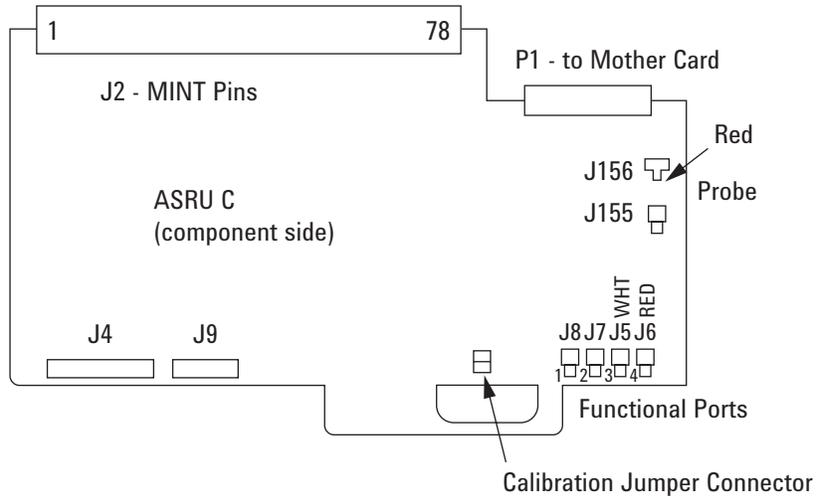


Figure 2. Connector locations on ASRU Card

# 1. DUT Power Supplies

Each ASRU card can provide up to six channels of DUT power supply output depending on the model of DUT power supply unit. Details of the pin out on the MINT pins are shown in Table 2.

Table 2. ASRU C MINT pins for DUT power supply output

Bank				
1	2	Pin	Name	Function
78	1	1	P1LA	PS #1 Low A
77	2	2	P1LB	PS #1 Low B
76	3	3	P1HA	PS #1 High A
75	4	4	P1HB	PS #1 High B
74	5	5	P1SL	PS #1 Sense Low
73	6	6	P1SH	PS #1 Sense High
72	7	7	P2LA	PS #2 Low A
71	8	8	P2LB	PS #2 Low B
70	9	9	P2HA	PS #2 High A
69	10	10	P2HB	PS #2 High B
68	11	11	P2SL	PS #2 Sense Low
67	12	12	P2SH	PS #2 Sense High
66	13	13	P3LA	PS #3 Low A
65	14	14	P3LB	PS #3 Low B
64	15	15	P3HA	PS #3 High A
63	16	16	P3HB	PS #3 High B
62	17	17	P3SL	PS #3 Sense Low
61	18	18	P3SH	PS #3 Sense High
60	19	19	P4LA	PS #4 Low A
59	20	20	P4LB	PS #4 Low B
58	21	21	P4HA	PS #4 High A
57	22	22	P4HB	PS #4 High B
56	23	23	P4SL	PS #4 Sense Low
55	24	24	P4SH	PS #4 Sense High
36	43	43	P5LA	PS #5 Low A
35	44	44	P5LB	PS #5 Low B
34	45	45	P5HA	PS #5 High A
33	46	46	P5HB	PS #5 High B
32	47	47	P5SL	PS #5 Sense Low
31	48	48	P5SH	PS #5 Sense High
26	53	53	P6LA	PS #6 Low A
25	54	54	P6LB	PS #6 Low B
24	55	55	P6HA	PS #6 High A
23	56	56	P6HB	PS #6 High B
22	57	57	P6SL	PS #6 Sense Low
21	58	58	P6SH	PS #6 Sense High





### 3. Fixture Power Supplies on ASRU-N Card

The ASRU Revision N card is equipped with two fixed output power supply channels called the Fixture Power Supply channels. The Fixture Power Supply (FPS) capability provided by the ASRU-N card is intended for fixture electronics and other external powering purposes. FPS is capable of generating 12 VDC @ 1 A and 5 VDC @ 2 A outputs from the MPU +20 VDC output, and the outputs are connected to the MINT pins (two identical sets of four FPS pins). The 12 VDC output can be used to power the CET card in the fixture.

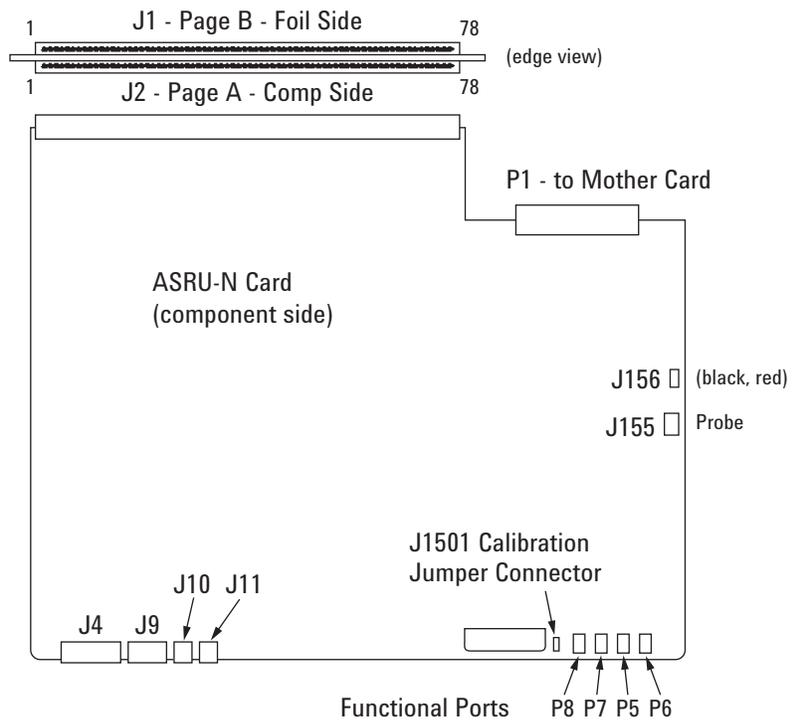


Figure 5. Fixture power supply pin out of ASRU N card

#### MINT Pins – J1

Pin	Name	Function
9	FPS_12V	Fixture Power Supply 12 V
10	FPS_12VGND	Fixture Power Supply 12 V GND
11	FPS_5V	Fixture Power Supply 5 V
12	FPS_5VGND	Fixture Power Supply 5 V GND

### 3. Fixture Power Supplies on ASRU-N Card

It is important to note that the outputs from the FPS are not electrically isolated from system ground. This means a 12 V relay has to be installed in the fixture for isolation during unpowered tests, since the CET card requires a connection to the ground plane of the fixture. This relay can be wired in a way that it will close the connection once the power is turned on from the FPS.

Figure 6 shows the connection for a 12 V relay. The output from the FPS is wired to both the COM and the coil pins of the relay. From the relay, the Normal Open (NO) pins are wired to the CET card. When power is turned on, the 12 V will energize the coil, which in turn will close the relay contact to establish the power to the CET card.

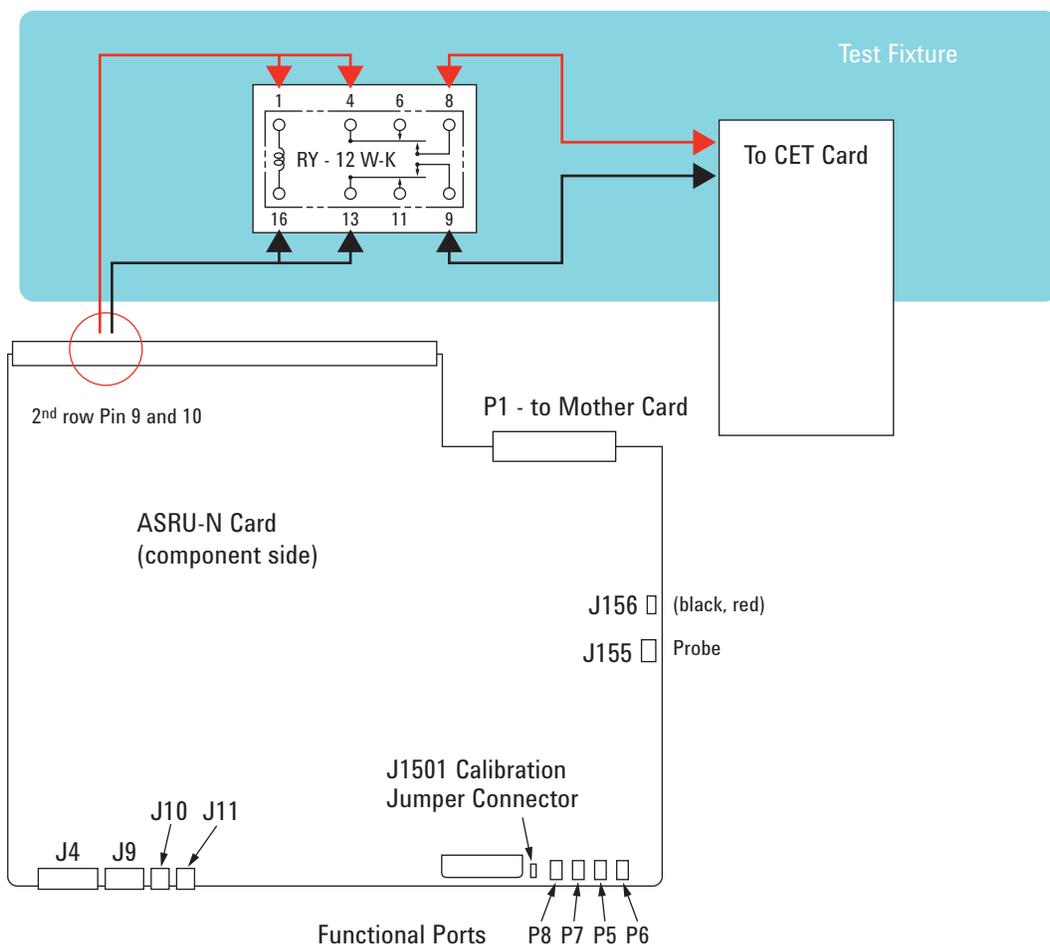


Figure 6. Fixture power supply isolation from system ground



### Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products and applications you select.



[www.lxistandard.org](http://www.lxistandard.org)

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.

### Agilent Channel Partners

[www.agilent.com/find/channelpartners](http://www.agilent.com/find/channelpartners)

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

[www.agilent.com/find/advantageservices](http://www.agilent.com/find/advantageservices)



[www.agilent.com/quality](http://www.agilent.com/quality)

[www.agilent.com](http://www.agilent.com)

[www.agilent.com/find/limitedaccess](http://www.agilent.com/find/limitedaccess)

[www.agilent.com/find/ict](http://www.agilent.com/find/ict)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

#### Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3500
Mexico	01800 5064 800
United States	(800) 829 4444

#### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

#### Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 131 452 0200

For other unlisted countries:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

Revised: June 8, 2011

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2010, 2011  
Published in USA, June 23, 2011  
5990-6549EN



**Agilent Technologies**