

S E R V I C E N O T E

SUPERSEDES: None

J2219A Network Advisor

Serial Numbers: 0000A00000 / 9999A99999

Monochrome LED Board Modification (NOT Color)

J2176-66502 LED Board Assembly

Duplicate Service Notes:

- J2213A-03
- J2219A-02
- 4980A-11
- 4981A-11
- 4982A-11

Situation:

When new monochrome assembly 5063-1880 is required to replace the older 5062-9677 display, the LED board must be modified. The modification will allow a greater range of brightness adjustment.

Solution:

1. Remove fastener(s)
2. Disconnect jumper wires


Continued

DATE: 16 November 1993

ADMINISTRATIVE INFORMATION

SERVICE NOTE CLASSIFICATION:			
MODIFICATION RECOMMENDED			
ACTION CATEGORY:	<input type="checkbox"/> IMMEDIATELY <input checked="" type="checkbox"/> ON SPECIFIED FAILURE <input type="checkbox"/> AGREEABLE TIME	STANDARDS:	Labor 1.0 Hour
LOCATION CATEGORY:	<input type="checkbox"/> CUSTOMER INSTALLABLE <input type="checkbox"/> ON-SITE <input checked="" type="checkbox"/> SERVICE CENTER	SERVICE INVENTORY:	<input type="checkbox"/> RETURN <input type="checkbox"/> SCRAP <input checked="" type="checkbox"/> SEE TEXT
AVAILABILITY:	PRODUCT'S SUPPORT LIFE	USED PARTS:	<input type="checkbox"/> RETURN <input type="checkbox"/> SCRAP <input checked="" type="checkbox"/> SEE TEXT
AUTHOR: NB	ENTITY: 3800	AGILENT RESPONSIBLE UNTIL: 16 November 1995	
		ADDITIONAL INFORMATION:	

3. Carefully snap out LED display board assembly
4. Locate jumper and remove at one of either location as shown in the diagram

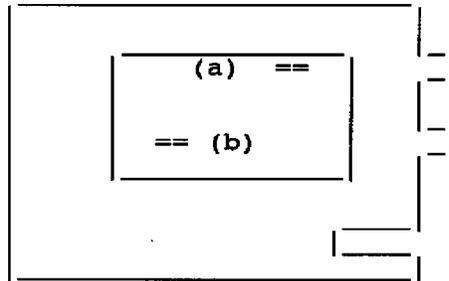

**Jumper locations
(a) or (b) is on
the small board.**

5. Reinstall wires/fasteners and board assembly
6. Test brightness operation